



TECHNICAL SPECIFICATION

CYLINDER TYPE: FE-154-03-3880

TIPPING WEIGHT : 37 - 80 TONS

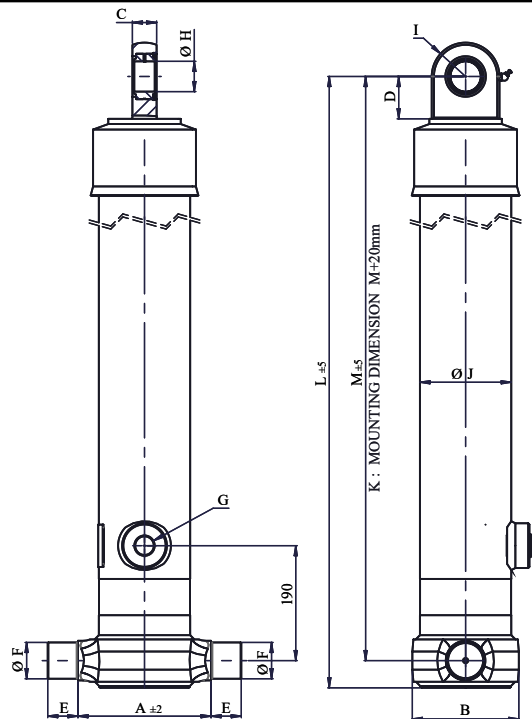

A	: 234	mm
B	: 176	mm
C	: 40	mm
D	: 70	mm
E	: 50	mm
F	: 60	mm
G	: 1"	BSP
H	: 50	mm
I	: 56	mm
J	: 152	mm
K	: 1610	mm
L	: 1635	mm
M	: 1590	mm

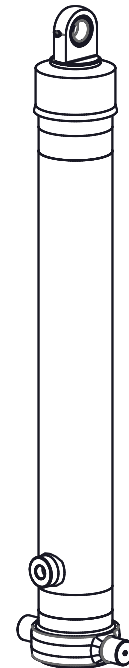

FRONT END, SINGLE ACTING TELESCOPIC CYLINDER


Stages	1	2	3	4	5	6	Part No	: IFD154033880
Diameter (mm)	154	135	116				No. of stages	: 3
Stroke (mm)	1293	1297	1290				Total stroke	: 3880 mm
Oil (L)	24	18.6	13.6				Working volume	: 56.3 L
Thrust (KN) @ P max	372	286	211				Avg. working load	: 181 KN

TECHNICAL NOTE

Mounting dimension (K) 1590 +20 (-5,+30)mm minimum pull out	Max pressure : 200 bar	Weight : 189 Kg
Seal ring Temperature : -40°C to +100°C	Max linear speed : 0.5 m/s	
Outer stage powder coated to semi glossy finish min thickness 30µm, RAL 9005		
All stage tubes are chrome plated to min 15µm		


This cylinder has been designed to provide only a linear pushing force. This cylinder is not a structural member and must not be used as a stabilizer or subjected to side or pushing load. This cylinder will not prevent the dump body or trailer from rollover or lateral tilt. Cylinder rated pressure reflects only the capability of the pressure-containing envelop and not the force transmitting capability of mounting configurations. The original use of telescopic cylinder will not require any coating since the telescopic stages are exposed to atmospheric agents only during the tip-up operation, if duration is below 2 hours. The tipping body weight + max payload are the maximum tipping weight that can be raised by this cylinder. This value calculated at the max pressure is a rough indication of the tipping load of the cylinder and must be used as a first criteria for the selection of the cylinder. The real tipping weight can only be calculated by the design engineer and must take into account the geometry of the tipping body, operating condition and all the reasonably foreseeable users.

Cylinder bottom bracket

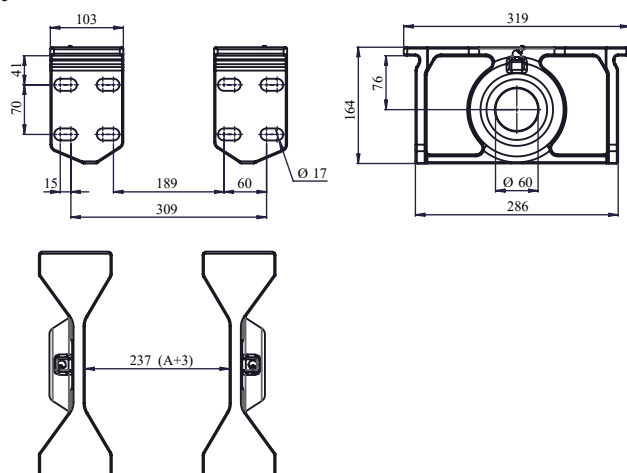

Tipping angle

Stroke		BODY TILTING				
L [mm]		40	45	48	50	55
4000	2736	3061	3254	3381	3694	
4500	3078	3444	3661	3804	4156	
5000	3420	3827	4067	4226	4617	
5300	3625	4056	4311	4480	4895	
5600	3831	4286	4555	4733	5172	
6000	4104	4592	4881	5071	5541	
6300	4309	4822	5125	5325	5818	
6600	4515	5051	5369	5579	6095	
7000	4788	5358	5694	5917	6464	
7300	4993	5587	5938	6170	6742	
7600	5199	5817	6182	6424	7019	

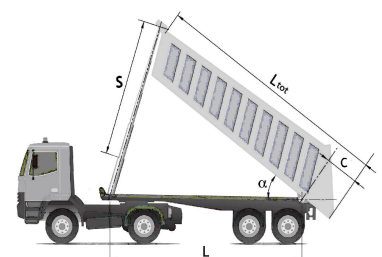

$$\alpha = \text{Stroke} \times \left(\frac{60}{L} \right)$$